


•SPECIFICATION FOR STEP CONVERTOR MD44 (24V-70)

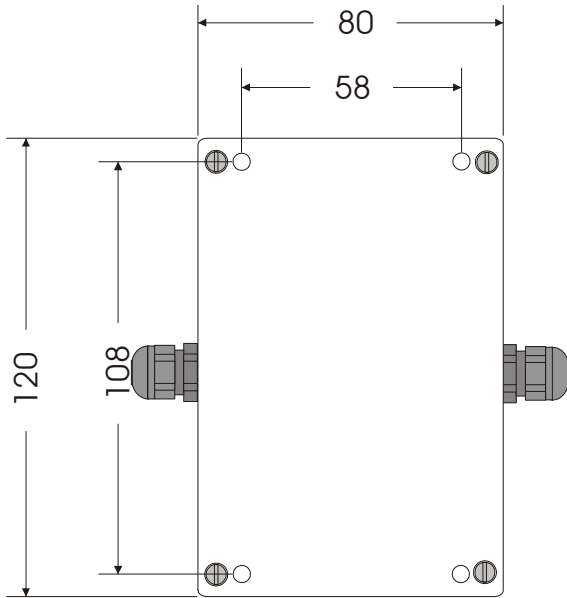


• Physical

- Weight 0.22Kg
- Mounting Bulkhead
- Finish Grey
- Connections 2 x 6 way screened cable (five cores used)
- Construction Polycarbonate Enclosure

• Electrical

- Power Supply 24v DC
- Data Input 1x 24volt 6 step per degree input common negative
- Data Output 1x 70V 6 step per degree common negative output (0.17A per line)

Allow 50mm clearance for cables

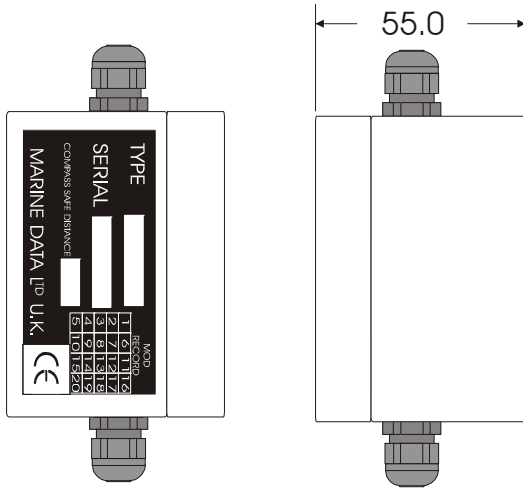



• Environmental

- Rating IP65
- Temperature -10° C to +70° C

• Mounting Information

- See diagram at right for mounting information.

Remove lid for access to fixing holes and Connecting Ships cable

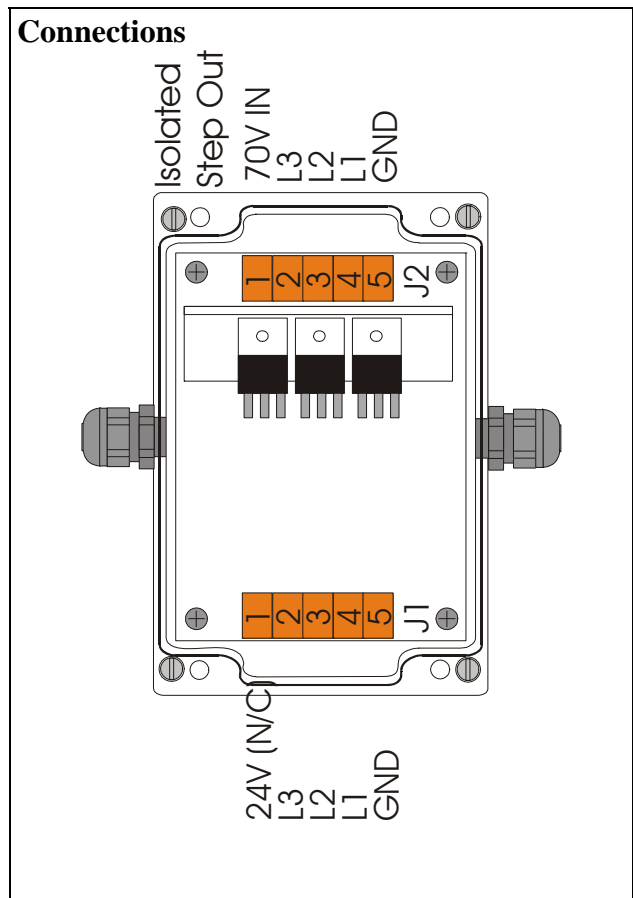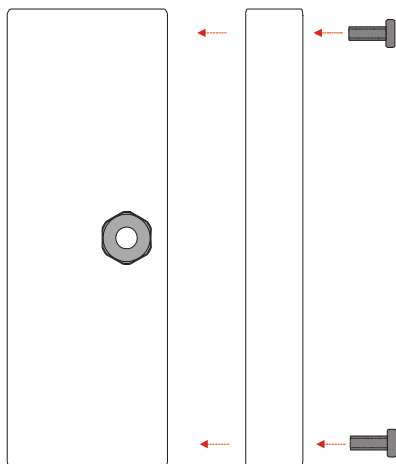

MARINE DATA RESERVES THE RIGHT TO MAKE CHANGES TO ITS PRODUCTS AND SPECIFICATIONS WITHOUT NOTICE